

Modulate™ Straight 424

MOD-S-424

Modulate™ consists of a set of frames made from aluminium tubes (Ø30 mm) covered with a printed tension fabric graphic. These frames can be connected together using powerful magnets inside each frame. Modulate range is available in 11 different sized formats.

- Thanks to the exclusive **MagLink** magnetic system built into the structure, you can connect the frames by simply touching them together.
- With the **Twist & Lock** system, simply position the foot under the structure, turn it and it's locked!
- The graphics are very easy to maintain thanks to the crease-resistant and machine washable textile cover. Stretch fabric with zip system.



360° MagLink connector in each pole. 4 magnets per structure



400 mm extension included



Self-locking system with bungee poles and push-buttons



Simple assembly with numbered frame parts



Central reinforcement tube (Ø 18 mm)



2 stabilising feet with Twist & Lock supplied with each frame



Double-sided tension fabric. Zip system



Modulate™ carry bag with dedicated compartments for the feet and graphics

Structure informations :	
Item	Modulate Straight 424
Code	MOD-S-424
Structure dimensions	418 (w) x 2400 (h) x 400 (d) mm
Graphic visual area	400 (w) x 2382 (h) mm
Boxed dimensions (2 boxes)	1000 (w) x 245 (h) x 125 (d) + 460 (w) x 65 (h) x 65 (d) mm
Structure weight	6.38 kg
Boxed weight (2 boxes)	6.86 kg



OPTIONAL ELEMENTS :



Modulate half feet (pair)
MOD-HALF-FOOT-P
218 (w) x 6 (h) x 80 (d) mm



Spot LED Flood
LED-FLOOD-ARM-BDLK




Spot LED Strip
LED-STRIP-ARM-BDLK



Universal light fitting kit
US901-C

MIX & MATCH THE 11 MODULATE FRAMES :

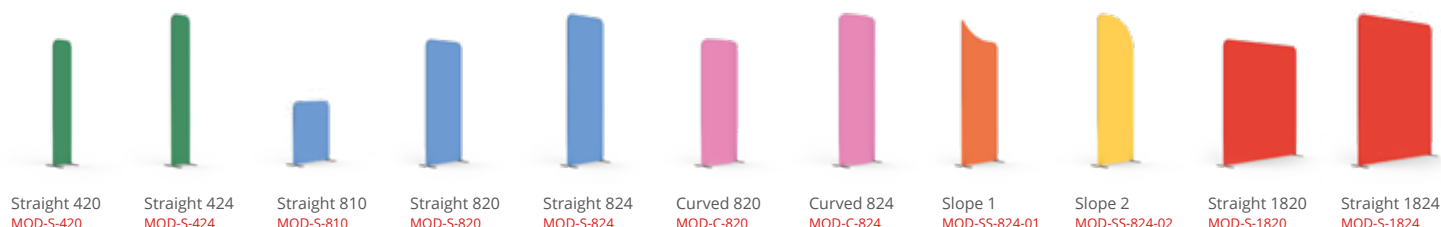

Straight 420
MOD-S-420

Straight 424
MOD-S-424

Straight 810
MOD-S-810

Straight 820
MOD-S-820

Straight 824
MOD-S-824

Curved 820
MOD-C-820

Curved 824
MOD-C-824

Slope 1
MOD-SS-824-01

Slope 2
MOD-SS-824-02

Straight 1820
MOD-S-1820


Straight 1824
MOD-S-1824

Modulate™ Straight 424


MOD-S-424




ELEMENTS

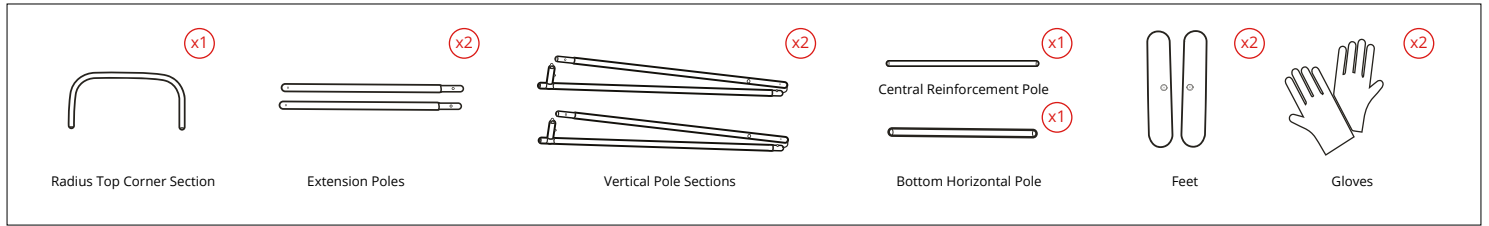

ASSEMBLY

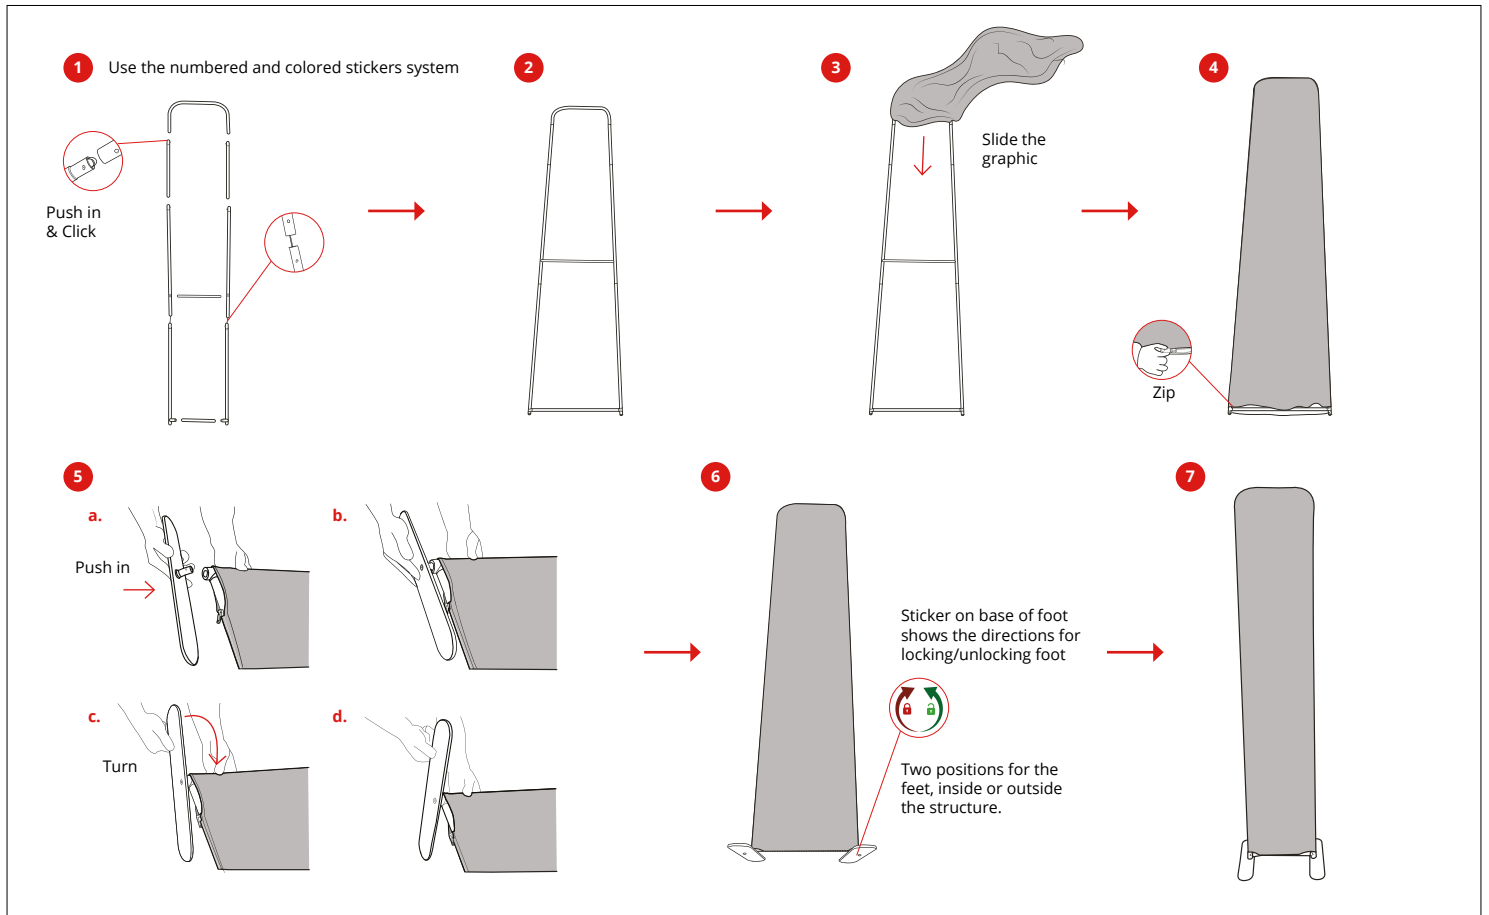


RECONFIGURABLE HEIGHT 2400 MM → 2000 MM

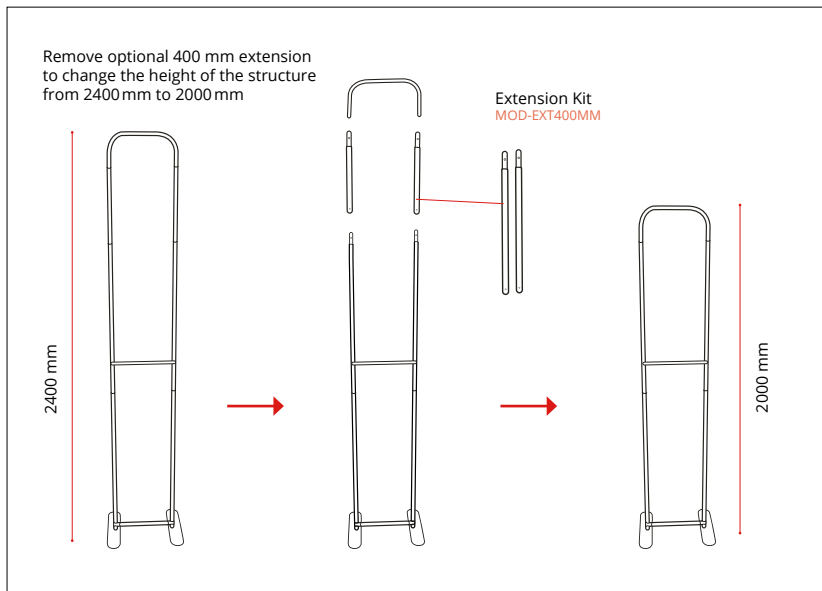

CONNECTING MULTIPLE FRAMES

Remove one foot from second frame and align both frames on one foot

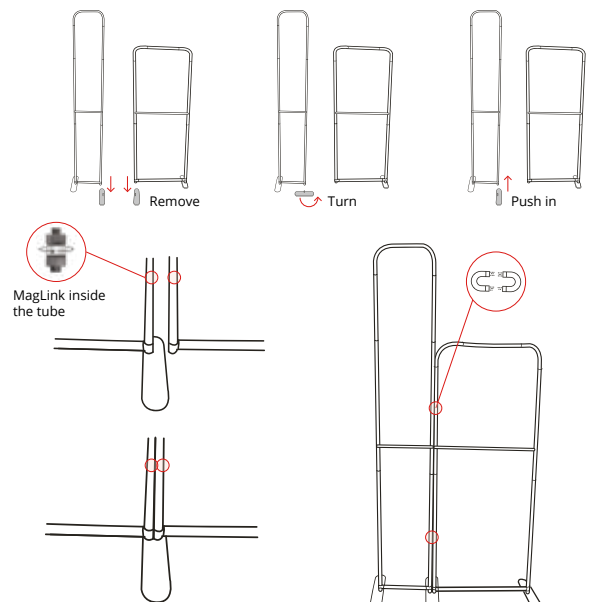

MODULATE™